
AH80 Bluetooth Headset



User manual

8AL91470ENAA ed01





Introduction

Thank you for purchasing the Alcatel-Lucent Enterprise AH80 Bluetooth Headset. We hope you enjoy it.


This User Manual will get you started and help you make the most of your headset.

Features


- HD audio technology & cVc noise cancellation
- Retractable microphone boom
- Up to 45 hours battery life & wireless charging capability
- Advanced Active Noise Cancellation (ANC) and transparency mode for you to hear your surroundings better
- Bluetooth connection range of up to 75 meters (laboratory data)
- Compatibility with mainstream Unified Communications (UC) platforms and deskphones
- Multi-language voice prompts supported: Chinese, English, French, German, Spanish, Portuguese and Italian




Headset overview	
2 Accessories	5
3 Connection	6
4 Wearing the headset	8
5 Charging	9
6 Using the headset	11
6.1 Call handling	11
6.1.1 Answering / Rejecting a call	11
6.1.2 Ending / Holding a call	11
6.1.3 Mute on / off	12
6.1.4 Status light change / off	12
6.1.5 Handling multiple calls	13
6.2 Activating voice assistant	13
6.3 Music mode	14
6.4 Settings	14
6.4.1 ANC / Transparency mode	14
6.4.2 Customizing prompt languages	15
6.4.3 Restoring factory settings	16
6.5 Checking the battery level	16
7 Indicator lights	17
8 Support	19
9 Maintenance	21
10 Warning	22




1 Headset overview

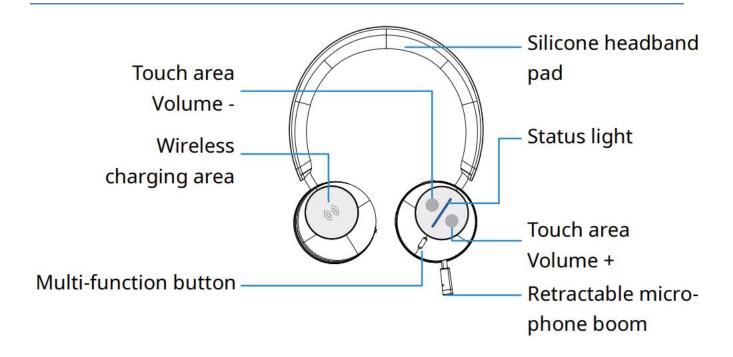

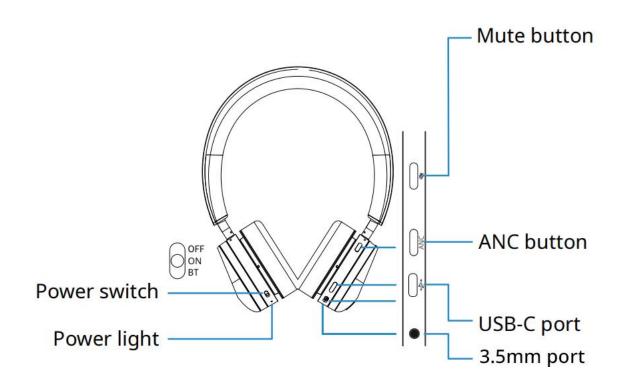

8AL91470ENAA ed01 4/23



2 Accessories

Make sure you have the following items in the package with your headset:





Carry case

USB-A to USB-C charge cable






3.5mm aux cable

USB dongle

Note: The actual product may differ in appearance from the images shown.



3 Connection


Connecting AH80 to your PC, deskphone or smartphone/tablet.

USB Dongle



Plug the USB dongle into your PC or deskphone and slide the switch to the middle position to power on AH80. AH80 will connect with the dongle automatically.

Bluetooth

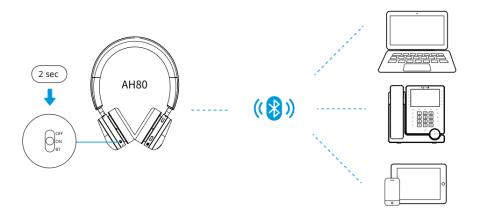

Slide the switch to the end position and hold for 2~3s to power on AH80 and enter pairing mode. Then, power on Bluetooth on your Bluetooth device and select AH80 for pairing.

• 3.5mm Aux Cable




When AH80 runs out of power, you can also connect via a 3.5mm aux cable to listen to music or for communication.

8AL91470ENAA ed01 6/23



Note: If you connect a 3.5mm aux cable into AH80 in powered-on state, AH80 will enter into powered-off state when you can use it as a wired headset. To use Bluetooth, you will need to unplug the 3.5mm cable, slide the switch to the OFF position and then turn it back on.


8AL91470ENAA ed01 7/23



4 Wearing the headset




Adjust the headband to make a comfortable fit for your head.




The microphone boom is retractable. You can pull it out closer to your mouth to achieve optimal sound and hide it when listening to music or watching movies.

8AL91470ENAA ed01 8/23




5 Charging

USB Cable



Plug the Type-C connector at one end of the USB cable into AH80 and the Type-A connector into the charger or PC. It takes approximately 2 hours to fully charge the headset. It is recommended to use a DC 5V 1A charger.

· Wireless charging



Put the left earphone onto the wireless charging base. It takes approximately 2.5 hours to fully charge the headset. It is recommended to use a Qi-certified wireless charger.



Note: When fully charged, the headset provides around 35 hours of talk time and up to 45 hours of playback time.

8AL91470ENAA ed01 10/23




6 Using the headset

6.1 Call handling

6.1.1 Answering / Rejecting a call

When there is an incoming call, you can control it via the multi-function button (MFB) on the right earphone.




Multi-function button

Answer a call: Press the MFB

Reject a call: Press twice the MFB

6.1.2 Ending / Holding a call




While on a call, you can

end a call: Press the MFB

• hold/Resume a call: Hold the MFB for 1 second


8AL91470ENAA ed01 11/23



6.1.3 Mute on / off

During on a call, you can


 mute / unmute your microphone: Press the Mute button




6.1.4 Status light change / off

While on a call, you can switch the status light between red, blue and off. When needed, you can use red light to indicate busy state and blue light to indicate available state. The headset saves and remembers last output state of the status light after power off.


Change/Turn off the status light: Hold the Mute button for 2 seconds (Red/Blue/Off)



8AL91470ENAA ed01 12/23




6.1.5 Handling multiple calls



While there are multiple incoming calls, you can

- end the current call to accept the incoming one/end the incoming call and resume the call on hold: Press the MFB
- reject the incoming call: Press twice the MFB
- put the current call on hold and answer the incoming one/put the incoming one on hold and resume the original call: Hold the MFB for 1 second


6.2 Activating voice assistant




In idle state, you can

• activate your voice assistant (e.g. Siri, Google Assistant or Alexa): Hold the MFB for 1 second

8AL91470ENAA ed01 13/23



6.3 Music mode



Play/Pause music: Press the MFB

Volume up: Tap the Volume + area

Volume down: Tap the Volume – area

Previous track: Press and hold the Volume - area for 1

second

Next track: Press and hold the Volume + area for 1


second

6.4 Settings


6.4.1 ANC / Transparency mode

You can control the ANC mode and switch to transparency mode via the ANC button. In transparency mode, you can hear the world around you without taking off your headset.

ANC mode on / transparency mode on / ANC mode off: Press the ANC button




8AL91470ENAA ed01 14/23





6.4.2 Customizing prompt languages

The headset supports multiple voice prompt languages, including Chinese, English, French, German, Spanish, Portuguese and Italian. To switch between languages, press the MFB and ANC button simultaneously for over 2 seconds.




Multi-function button






6.4.3 Restoring factory settings

Factory reset the headset: Press both the Mute button and the ANC button simultaneously for more than 6 seconds



6.5 Checking the battery level

When the headset is powered on and no Bluetooth device is connected, you can check the battery level by listening to the voice prompt.




Multi-function button

Listen to remaining battery percentage voice prompt: Press the MFB

8AL91470ENAA ed01 16/23




7 Indicator lights



•	Powered off/standby mode
*	Pairing
	Bluetooth connected
	On for 10s More than 70% power remaining
	On for 10s 30%~70% power remaining
	On for 10s 10%~30% power remaining
*	On for 10s Less than 10% power remaining
	Charging above 70%
	Charging 30%~70%
•	Charging 10%~30%
*	Charging less than 10%


8AL91470ENAA ed01 17/23






•	Powered off Standby/Music mode
	Powered on On for 10s
- ₩-	Charging
	Fully charged On for 10s
-	Incoming call alert
	Busy (on a call or meeting)
	Rebooting/Updating firmware
	Upgrade completed

8AL91470ENAA ed01 18/23



8 Support

The ALE Go app helps you boost your headset performance through regular firmware updates.

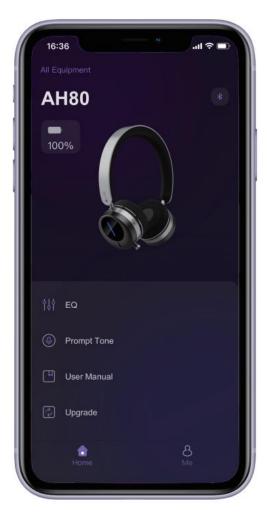



Download ALE Go to stay tuned for the latest firmware updates available.

- Select an EQ mode
- Customize the prompt language
- View the User Manual
- Perform firmware upgrades













9 Maintenance

- Please store your headset in the carry case that it came in when not in use.
- To prevent battery depletion, please avoid storing your headset in a too hot or too cold environment (e.g. in the car in summer or winter).
- Keep the headset from getting wet. If the headset gets wet, leave it long enough to dry fully before powering it on.
- It is recommended to keep the headset at a temperature between -10°C and 45°C (23°F and 113°F).
- Do not store the headset for long periods of time without charging. It is advisable to charge the battery at least once every six months to maintain its performance.




10 Warning



Do not listen at high volume levels for long periods.

8AL91470ENAA ed01 22/23



www.al-enterprise.com The Alcatel-Lucent name and logo are trademarks of Nokia used under licence by ALE. To view other trademarks used by affiliated companies of ALE Holding, visit: www.al-enterprise.com/en/legal/trademarks-copyright. All other trademarks are the property of their respective owners. The information presented is subject to change without notice. Neither ALE Holding nor any of its affiliates assumes any responsibility for inaccuracies contained herein. © Copyright 2024 ALE International, ALE USA Inc. All rights reserved in all countries.

8AL91470ENAA ed01 23/23